



# M1W VIA RGB 三模键盘用户手册

M1W VIA RGB Multi-mode RGB Mechanical Keyboard

User Manual

快速开始指南 ▶


Quick Start Guide

# 感谢您购买及使用本产品



为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

## 包装内容

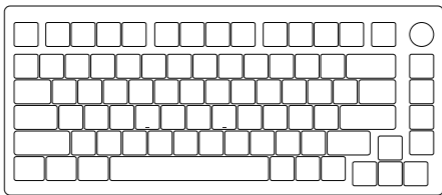

## 系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


## 安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

## 独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	红灯慢闪	红灯快闪	红灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	黄灯慢闪	黄灯快闪	黄灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	白灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	独立LED指示灯 (空格键附近)	红灯慢闪		
充电		红灯常亮		
充满		灯灭		
Caps	Caps按键灯位	白灯常亮		
锁WIN	左WIN键灯位	白灯常亮		

## M1W VIA组合键功能


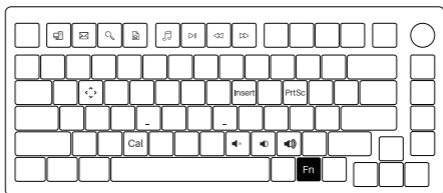


Fn+	F1	=	我的电脑
	F2	=	电子邮件
	F3	=	Windows搜索
	F4	=	浏览器主页
	F5	=	多媒体播放器

Fn+	F6	=	播放 / 暂停
	F7	=	上一首
	F8	=	下一首
	P	=	Prtsc
	C	=	计算器

Fn+	I	=	Insert
	M	=	静音
	<	=	音量减小
	>	=	音量增加
	W	=	将 W A S D 与 ↑ ↓ ← → 键对调

## M1W VIA系统功能 (Windows)

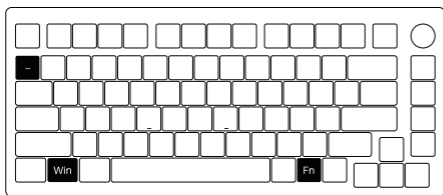

旋钮功能


锁Win键

Fn + 左Win

恢复出厂设置


长按 Fn + ~ 5秒

## M1W VIA系统功能 (Mac)

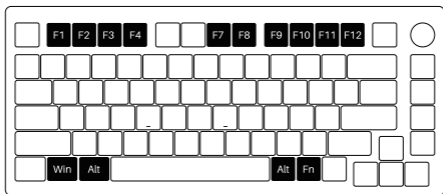

F1	降低显示屏亮度	F7	上一曲	F11	调低音量
F2	增加显示屏亮度	F8	播放/暂停	F12	调高音量
F3	开放任务控制	F9	下一曲	左Win	Option
F4	呼出Siri	F10	静音	左Alt	Command
右Alt	Command	Fn + (F1-12)	F1 ~ F12		

## M1W VIA灯光调节

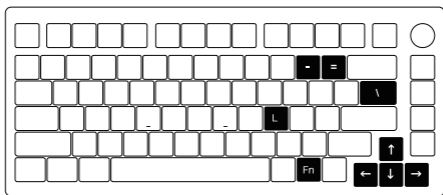

Fn++	灯光速度变慢	Fn+↑	灯光变亮+
Fn+=	灯光速度变快	Fn+↓	灯光变亮-
Fn+L	灯光关闭/开启	Fn+←	切换灯光饱和度-
Fn+\	按键背光灯光模式切换, 共17种	Fn+→	切换灯光饱和度+

# M1W VIA连接使用指南



Fn+	E	蓝牙设备1	 开关位于 CAPS按键右侧	上：Mac (内置电源开)
	R	蓝牙设备2		中：Windows (内置电源关)
	T	蓝牙设备3		下：Windows (内置电源开)
	Y	2.4G无线设备		
	U	有线模式		

## 蓝牙配对

键盘开机后，按下Fn+E/R/T进入蓝牙模式，长按Fn+E/R/T组合键3S，键盘进入对码状态，红\蓝\黄色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

## 2.4G配对

键盘开机后，按下Fn+Y进入2.4G模式，再按下Fn+Y组合键3S进入配对模式后，插入接收器，指示灯快闪，配对成功后退出对码，模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

## 电量查询

在无线模式下，按Fn+空格组合键可检查电池电量。如果电池电量低于30%，数字1-2键将显示红灯。如果电池电量低于100%，数字1-9键将显示绿灯，电池电量充满则数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%	低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满	

亮红灯

亮绿灯

## 按键/灯光自定义说明和调用说明

1. 键盘的按键以及灯光更深层次的自定义需配合VIA实现
2. 请用户前往[monsgeek.com/download/](https://monsgeek.com/download/)来下载VIA程序

## MONGEEK保修和服务声明

1. MONGEEK为中国大陆的客户提供一年保修。对于其他地区，请联系您的卖家（MonsGeek分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，MonsGeek也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 由于私自拆卸产品、使用不当和安装不当而导致的缺陷不在保修范围内。
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00  
节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：[www.monsgeek.cn](http://www.monsgeek.cn)

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:  
Water and Beverages can't be  
poured into the Keyboard.




中国制造/Made in China

### 注意 事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品  
请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

## Packing List

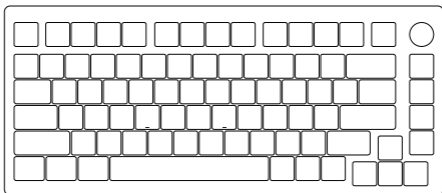

## Minimum System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


## Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

## LED Indicator Overview



Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Red light blinks slowly	Red light blinks fast	Red light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Yellow light blinks slowly	Yellow light blinks fast	Yellow light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	White light stays on for 2 seconds and then turns off
Status	Indicator	Indicating Mode		
Low Battery	Independent LED Indicator (near spacebar)	Red light blinks slowly		
Charging		Steady red		
Fully Charged		Light off		
Caps	LED for Caps Key	Steady white		
Lock WIN	LED for left Win Key	Steady white		

## M1W VIA HotKeys

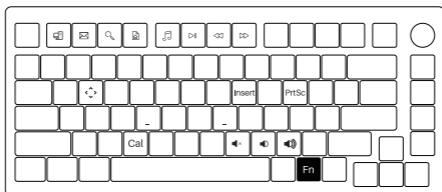

Fn+	F1	My Computer	Fn+	F6	Play/Pause	Fn+	I	Insert
	F2	E-mail		F7	Previous Song		M	Mute
	F3	= Windows Search		F8	= Next Song		<	= Decrease Volume
	F4	Browser Homepage		P	Print SCR		>	Increase Volume
	F5	Multimedia Player		C	Calculator		W	Swap WASD with ↑ ↓ ← →

## M1W VIA System Commands (Windows)

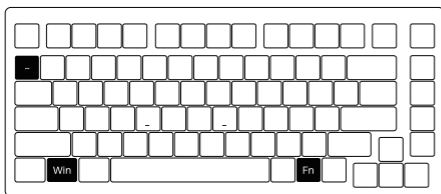

Press to mute function

### Lock Windows Key


Press Fn and  
left Win Key

### Restore Factory Settings

Hold down Fn and  
press ~ Key for 5S




## M1W VIA System Commands (Mac)

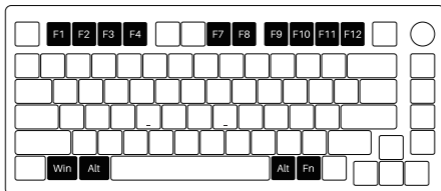


F1	Decrease display brightness	F7	Skip back (Audio)	F11	Volume down
F2	Increase display brightness	F8	Pause/Play (Audio)	F12	Volume up
F3	Open mission control	F9	Skip forward (Audio)	Left Win	Option
F4	Activate Siri	F10	Mute	Left Alt	Command
Right Alt	Command	Fn + (F1-12)	F1 ~ F12		

## M1W VIA Backlight Settings

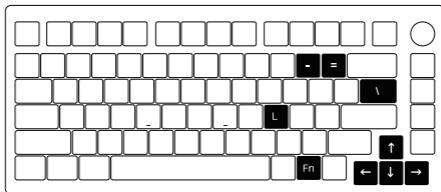


Fn+-	Slower Animation	Fn+ ↑	Bright
Fn+=	Faster Animation	Fn+ ↓	Dim
Fn+L	Light Off/On	Fn+←	Light Saturation -
Fn+\	Effect 1 - Effect 17	Fn+→	Light Saturation +

# M1W VIA Wireless/Wired Connection Guide

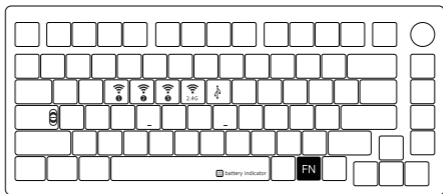

Fn+	E	Bluetooth Device 1
	R	Bluetooth Device 2
	T	Bluetooth Device 3
	Y	2.4G Wireless Device
	U	Wired Mode

 The switch is located under the CAPS key	Top: Mac (built-in power supply on)
	Middle: Default Windows (built-in power supply off)
	Bottom: Windows (built-in power supply on)

## Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode. Press and hold the FN+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the red/blue/yellow indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

## 2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

## Battery Level Check

Press the Fn + Space combination keys to check the battery level in wireless mode. If the battery level is below 30%, the LED for number keys 1-2 will show a red light. If it's between 30-100%, the LED for number keys 1-9 will show a green light. And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged

Red light

Green light

\*Note the LED indicator is located under the spacebar. To check the battery level, please make sure

① the keyboard is in wireless mode (with USB cable removed)

② the RGB mode is turned on.

# Key/Lighting Effects Customization Instruction

VIA is a widely recognized software that offers an intuitive interface for configuring and personalizing various keyboard settings. Users can utilize VIA to remap keys and adjust lighting on keyboards with VIA firmware.

**Web Version:** <https://usevia.app/>

**App:** <https://github.com/the-via/releases/releases>

It enables you to remap keys, create custom macros, customize lighting effects, and more. If you encounter connection issues, please load the corresponding JSON file specific to your keyboard model.

You can download JSON files from our dedicated Download page:

<https://www.monsgeek.com/download/>

## MONSGEEK Warranty and Service Statement

1. MONSGEEK provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (MonsGeek distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. MONSGEEK will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: [www.monsgeek.com](http://www.monsgeek.com)

Origin: Shenzhen, China



**WARNING:**

Water and Beverages can't be poured into the Keyboard.



中国制造/Made in China

### Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

